ORTLIEB (WATERPROOF)

BACK-ROLLER PRO PLUS

XLtouring pannier with roll closure and QL2.1 system



Additional closure with buckle (when the bag is carried with the shoulder strap)

Roll dosure

Front pocket with reflective thread

Buckles for fixing roll closure or shoulder strap

Shoulder strap with padding for comfortable carrying or for fixing to the hook

Lateral 3M Scotchlite reflector on both sides

PVC free










Carrying handle for mounting and releasing the QL2.1 system

Automatically closing 16mm QL2.1 hooks Exchangeablehook inserts with anti-scratch function (8, 10, 12 mm)



Edgeprotector with slots for mounting the Carrying System Bike Pannier



height cm/in wi		depth cm/in.	vol. Ltr.	weight gr.	max. capacity kgs.
45/17.7 36	6/24 14.1/9.4	26/10.2	35+4	1004	9

SPECIFICATIONS:

- + XLrear pannier (single) with roll closure for extended touring with lots of equipment
- + Outer front pocket (4 L) folds flat, with reflective thread, ideal for damp clothing
- + Material: PU-laminated Cordura
- + Integrated inner pocket and shoulder strap
- + Easyto clean inside
- + Twostrong 3M Scotchlite reflectors
- + QL2.1 mounting system for racks with tube diameter max. 16 mm
- + 18 mm & 20 mm hook available as accessory (e.g. for e-bikes)
- + Reduction inserts for tube diameters 8, 10 und 12 mm with anti-scratch-function protecting the rack from abrasions
- + Upper QL-hooksand lower hook adjustable without requiring any tools
- + Lowerhook with anti-scratch function protecting the rack from abrasions
- + Symmetrical shape allows use on right or left side
- + Can be combined on the rack with ORTLIEBRack-Packsize 24 Lor 31 L

Contents: Pannierpair with 2 shoulder straps, reducting inserts 8, 10 und 12 mm (2 pairs per size)

Optional accessories: Packing Cubes/Commuter Insert for Panniers, Carrying System Bike Pannier, Anti-Theft-Device (E125), Outer Pocket 2,1 L, Mesh-Pocket, Bottle-Cage, QL2.1 hook 18mm (E211) & 20mm (E193)

Attention: Maximumload per pannier is 9kg / 20 lbs. Werecommendweighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: Themaximumweight tallowance of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DONOTexceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.

Attention: As abrasion cannot be ruled out, we recommend that all points where the mounting system contacts the bicycle rack or frame be protected by scratch protection film.

Note In order to meet standard IP64 (6=dustproof, 4=protected against splash water coming from all directions) the roll closure must be rolled at least 3-4 times.

ORTLIEBSport art ikel GmbH · Rainstrasse 6 · 91560 · Heilsbronn, Germany · T + 49 9872 800-0 · F + 49 9872 800-266 · E info@ortlieb.com · www.ortlieb.com

QL2.1-SYSTEM

MONTAGEANLEITUNG:

GB **ASSEMBLY INSTRUCTIONS:**

ISTRUZIONI DI MONTAGGIO: NL MONTAGE HANDLEIDING:

ES **INSTRUCCIONES DE MONTAJE:** SE **MONTERINGS ANVISNING:**

FI **ASENNUSOHJEET:** INSTRUKCJA MONTAZU:









NO **MONTERINGS ANVISNING:**

換気の良い所に保管してください。




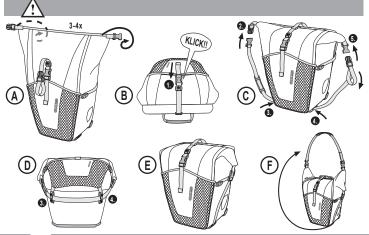








= + Art. #F34








90




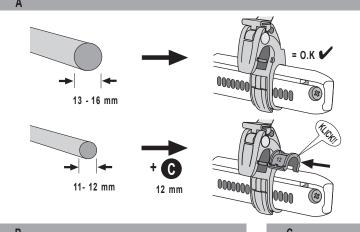












www.ortlieb.com

WA070 4917

