#### PRODUCT INFO

## ORTLIEB (WATERPROOF)

#### TRUNK-BAG RC

Waterproof trunkbag with roll closure and Top-Lock adapter













Roll closure with hook and loop fastener

PU-laminated nylon

Shoulder strap

Top-Lock adapter, adjustable to rack



Option for fixing a rear light (not included)

3M Scotchlite reflector

Release handles left and right



height cm/in.	width cm/in.	depth cm/in.	vol. L/cu.in.	weight g/oz.	max. load kg/lbs.
30/11.8	20/7.8	38/14.9	12/732	825/29	10/22
		T-			

#### **SPECIFICATIONS:**

- + Waterproof trunkbag with Top-Lock adapter
- + Ideal for short bike rides
- + Roll closure serves as carrying handle
- + Shoulder strap
- + Mounting option for tail light (tail light not included)
- + inner pocket with carabiner
- + 3M Scotchlite reflector
- + With ORTLIEB Top-Lock adapter system, universal fastening system for bicycle racks
- + Quick to install and easy to remove
- + Bag can be removed completely and without residue
- + Compatible with almost all racks from 80 to 160 mm width
- + Suitable for rack diameter of 8-16 mm
- + Two convenient release handles left and right
- + Anti-slip device prevents movement on the luggage carrier
- + Audible "click" sound when the hooks engage
- + Compatible with spring flap on bike carrier and E-Bike luggage racks (battery)
- + Hooks also work as parking feet

Contents: Trunk-Bag RC with universal Top-Lock adapter system

Attention: Maximum load 10 kg/22 lbs.!

Note: A second rack level allows QL2.1/QL3.1 bags to be attached at the same time

Note: In order to meet standard IP64 (6=dustproof, 4=protected against splash water coming from all directions) the roll closure must be rolled at least 3-4 times. Once submerged, the bag is not waterproof.

ORTLIEB Sportartikel GmbH · Rainstrasse 6 · 91560 · Heilsbronn, Germany · T +49 9872 800-0 · F +49 9872 800-266 · E info@ortlieb.com · www.ortlieb.com

### **PRODUCT INFO**


# ORTLIEB (WATERPROOF)

#### TOP-LOCK

Universal adapter system for mounting bags and baskets on bicycle racks






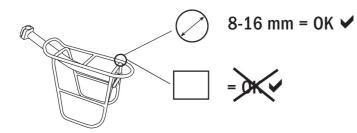







Top-Lock adapter must only be used on carriers with rectanglular base, e.g. left and right rails must be parallel to each other

Seite/Page 2/2