PRODUCT INFO




SPORT-ROLLER PLUS

Lowrider pannier or rear pannier (single) with QL2.1 system



Handle for mounting and releasing the QL2.1 system



Buckles for closing the rolling closure at the top or for attaching the shoulder strap

Highly reflective 3M Scotchlite reflector

Shoulder strap with padding for comfortable carrying or for fixing to the hook












Automatically locking QL2.1 hooks with 16 mm diameter Exchangeablehook inserts in sizes 8, 10 and 12 mm



Edgeprotector with slots for mounting the Carrying System Bike Pannier



Heightcm/in	Width cm/ in	Depth cm/ in	Volume Litre	Weight grams	Max. capacity kg
30/11.8	25/9.8	14/5.5	12.5	720 (single)	9 (single)

SPECIFICATIONS:

- + Classical pannier (single) with roll closure
- + Can be used individually or as pair as small rear pannier or for the lowider
- + Abrasion restistant Cordurafabric
- + QL2.1 system for racks up to 16 mm
- + 18 mm & 20 mm hook available as separate accessory (e.g. for e-bikes)
- + Including reduction pieces for tube diameters 8, 10 and 12 mm; with anti-scratch function reducing abrasions on rack
- + Top QLhooks and lower sliding hook adjustable without requiring any tools
- + Lowerhook rail made of two-component "hard-soft" synthetic reduces abrasions on carrier
- + Including integrated inner pocket and shoulder strap
- + Symmetrical shape allows use on right or left side
- + Can be combined on the rack with ORTLIEBRack-Packsize 24 Lor 31 L
- + Highly reflective 3M Scotchlite reflectors
- + Ideal for the use on children's/youth bicycles or folding electric bikes
- + Easyto clean inside

Contents: Pannier supplied with 1 shoulder straps and reduction inserts for 8, 10 and 12 mm

Optional accessories: Carrying System Bike Pannier, Anti-Theft-Device (E124), Outer Pocket2,1 L, Mesh-Pocket, Bottle-Cage, QL2.1 hook 18mm (E211) & 20mm (E193)

Attention: Maximumload per pannier is 9kg / 20 lbs. Werecommendweighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: Themaximumweight repair of every carrier model is different. Please observe the maximum capacity of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DONOTexceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.

As abrasion cannot be ruled out, we recommend that all points where the mounting system contacts the bicycle rack or frame be protected by scratch protection film.

In order to meet standard IP64 (6=dustproof 4=protected against splash water coming from all directions) the lid must be rolled 3-4 times.

ORTLIEBSport art ikel GmbH · Rainstrasse 6 · 91560 · Heilsbronn, Germany · T + 49 9872 800-0 · F + 49 9872 800-266 · E info@ortlieb.com · www.ortlieb.com

QL2.1-SYSTEM

- DE MONTAGEANLEITUNG
- **GB** ASSEMBLY INSTRUCTIONS
- FR INSTRUCTIONS DE MONTAGE
- ISTRUZIONI DI MONTAGGIO NL MONTAGE HANDLEIDING


 - MONTERINGSVEJLEDNING
- ES INSTRUCCIONES DE MONTAJE SE MONTERINGS ANVISNING
- NO MONTERINGS ANVISNING
- FI ASENNUSOHJEET
- PL INSTRUKCJA MONTAZU
- JP 装着方法


































QL2.1












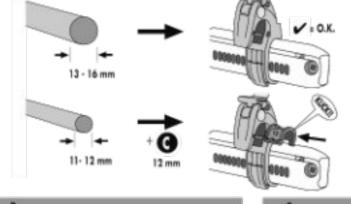


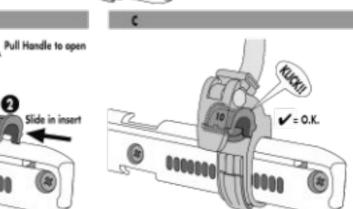





WK-042 4321

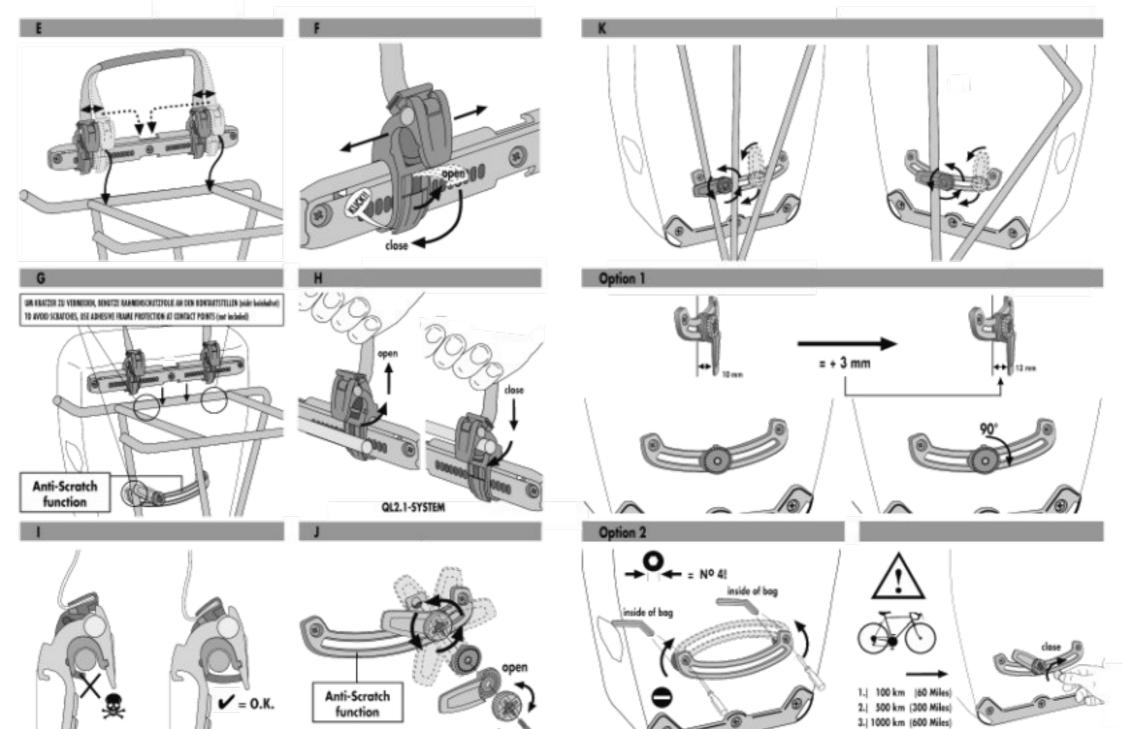

4.) 1500 km (900 Miles) etc.